
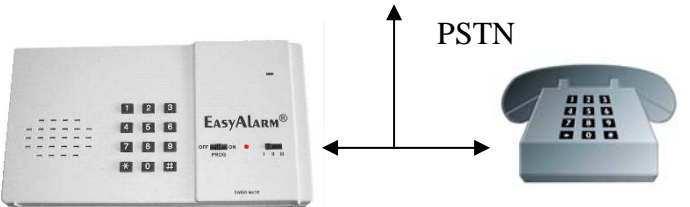

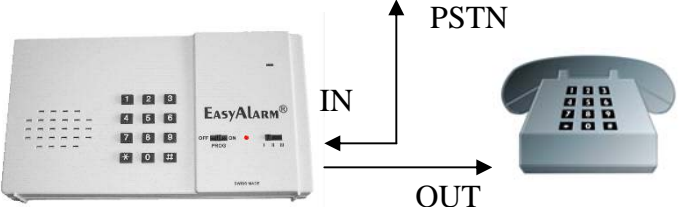

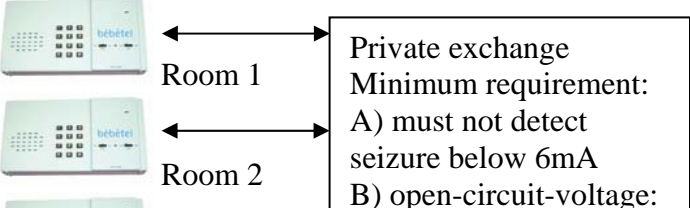


# Connectors

## ***Q*-LINE**

	Type-Label	RJ11	Connection	Telephone line sharing
Standard	BBT-3 BBT-3-EXT EA-4-EXT EA-4-433 EA-4-WRL EA-4-DPX		PIN 3: line a (red) PIN 4: line b (green)	 EasyAlarm/bébétel      other unit
Option PLUS	EA-4-EXT <b>N</b> EA-4-433 <b>N</b> EA-4-DPX <b>N</b>		PIN 2: line b' (black) => OUT PIN 3: line a (red) <= IN PIN 4: line b (green) <= IN PIN 5: line a' (yellow) => OUT	 EasyAlarm      other unit
Option AB	BBT-4- <b>AB</b>		PIN 3: line a (red) PIN 4: line b (green)  Standby-current from ab-line: Approx. 4 to 5mA => plug in jumper inside battery compartment	 Room 1 Room 2 Room n Private exchange Minimum requirement: A) must not detect seizure below 6mA B) open-circuit-voltage: > 22V

\*) PSTN: Public standard telephone network (analogue)

Option PLUS:

**EasyAlarm automatically disconnects the post-connected modem / telephone.** The emergency call is also possible if the line is already seized by a post-connected modem/telephone. After the alarm the post-connected telephone line is available again

Option AB: (only for use with private exchange, not for use directly on a PSTN)

**bébételAB for use in hotels/hospitals =>** During supervision mode the operation current will be supplied through the private exchange so the battery-lifetime will be increased! Supply from AB-line can be disabled by pulling out the jumper inside the battery-compartment => BBT-3